UTP blank patch panel with back bar, 24 port

Product features:

- The metal frame is made of high-strength cold-rolled steel sheet SPCC with a thickness of 1.50mm.
- The patch panel is compatible with various modular plug or pass through modular plug.
- Integrated bracket design, with a large cable management space in the rear cable management frame.
- The patch panel is equipped with 1-24 numerical markings below the ports.

Dimension:

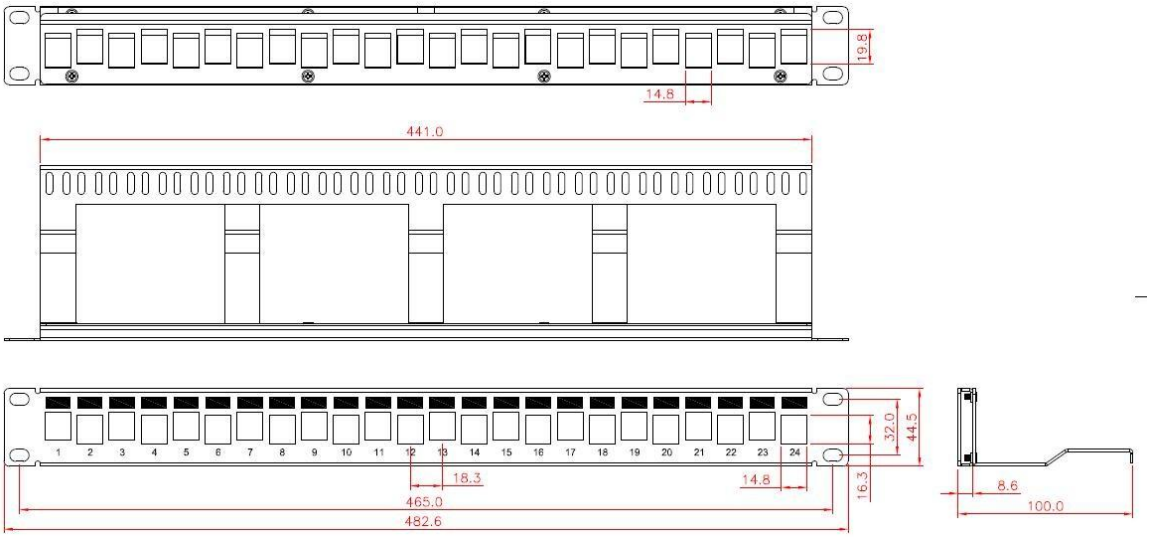

Specification:

Model	**NX-PP-24BM-1U**		Optional
Category	Category	Blanck patch panel	
	Shielding Type	Unshielded	
Material Specifications	Panel Material	Spray Plastic+ABS	
General Specifications	Product Color	Black	
	Rack Unit	1U	
	Number of ports	24	
	Flammability Rating	UL94V-HB	UL94V-2/UL94V-0
	Operating Temperature	–20 °C to +75 °C	
	Operating Humidity	10%–90% (RH)	
	Storage Temperature	–40 °C to +75 °C	
	Storage Humidity	10%–90% (RH)	
	Product Dimensions	482.60mm×100.00mm×44.50mm	
Accessory	Nut quantity	4	
	Screw quantity	4	
standard	Compliance Standard	ANSI/TIA568.2-D ISO/IEC 11801	